


## Millegeville 2,500 Gallon Grease Interceptor





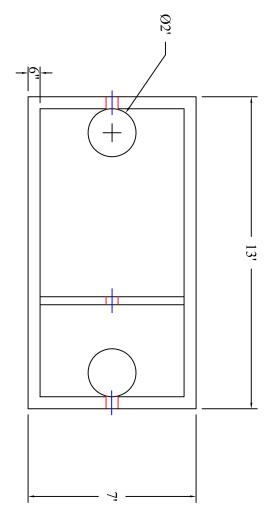

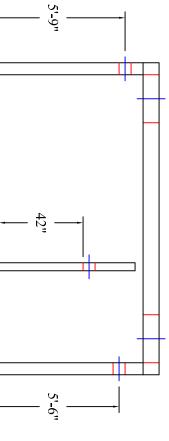



Scale: 1/4" = 1'

sales@bartowprecast.com WWW.BARTOWPRECAST.COM 770.382.4462

MODEL: GI 2500/182

PRODUCT INFORMATION

2,500 GALLON GREASE INTERCEPTOR

SPECIFICATIONS MEETS ASTM C 1613

TANK= 20,700# (LW) LID= 8,500 # BAFFLE= 1,700 # DESIGN MAY VARY

RATING: A-16 (H-20), ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

CONCRETE: 5,000 PSI @ 28 DAYS

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER

CROSSOVER TO BE 6" PVC



Drawn By: Checked By: Revision: Date: DRAWING INFORMATION CBC

P
Ť
$\overline{\mathcal{R}}$
r
$\circ$
$\geq$
< .
. 7
$\overline{}$
(-1
$\overline{}$
$\overline{}$
_
_
w
•
_
$\overline{}$
$\overline{\cdot}$
$\overline{\cdot}$
:`

1/29/16

sign:	print:

actual dimensions may vary slightly