


## OIL SEPARATOR 2,000 GALLON CAPACITY





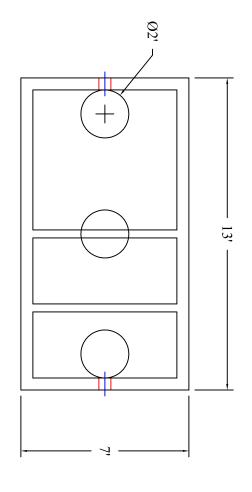

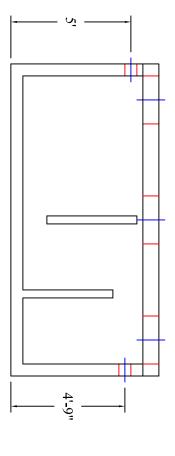





WWW.BARTOWPRECAST.COM sales@bartowprecast.com 770.382.4462

MODEL: OWS 2000 / 284

PRODUCT INFORMATION 2,000 GALLON OIL SEPARATOR

TANK = 22,000 # LID= 10,700 # BAFFLE= 1,200 # (EACH) DESIGN MAY VARY

MEETS ASTM C 1613 SPECIFICATIONS

RATING: A-16 (H-20), ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

CONCRETE: 5,000 PSI @ 28 DAYS

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS

ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER

MODIFICATION TO THIS DESIGN AVAILABLE UPON REQUEST

CALL FOR ADDITIONAL SPECS



DRAWING INFORMATION

Date:	Revision:	Checked By:	Drawn By:
2/6/17	_		CBC

APPROVED BY:

sign:	print:		
	1		
		-	
		. !	
		i	
		- 1	

\*actual dimensions may vary slightly