SEPTIC TANK
5,500 GALLON CAPACITY

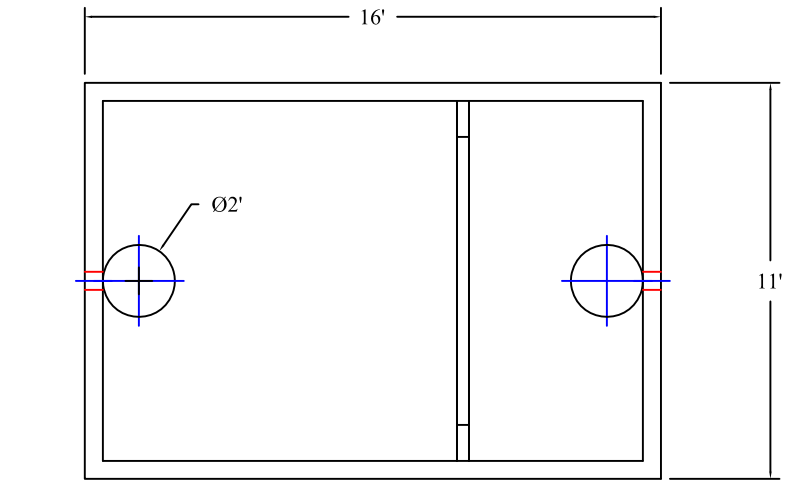

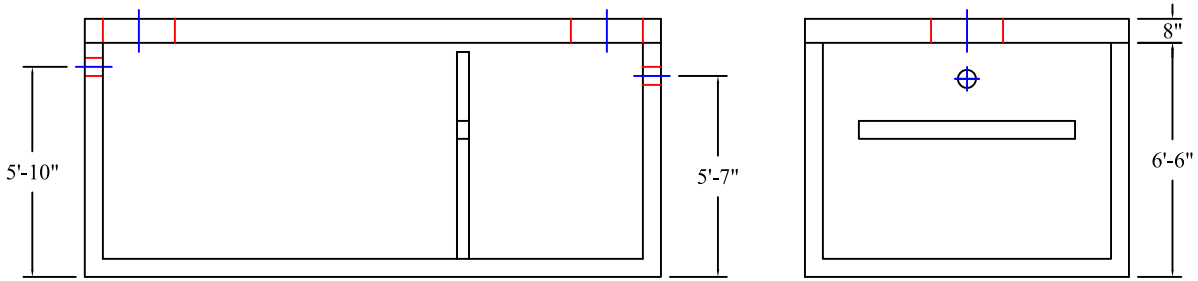

Scale: 3/16" = 1'

MODEL: 110-05500

PRODUCT INFORMATION

5,500 GALLON
SEPTIC TANK

TANK= 36,600 #
LID= 16,500 # BAFFLE= 2,850 #
DESIGN MAY VARY

SPECIFICATIONS

MEETS ASTM C 1227

RATING: A-16 (H-20), ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

CONCRETE: 5,000 PSI @ 28 DAYS

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS

MODIFICATION TO THIS DESIGN AVAILABLE UPON REQUEST

CALL FOR ADDITIONAL SPECS

NPCA CERTIFIED PLANT

DRAWING INFORMATION

Drawn By: CBC
Checked By: _____
Revision: 1
Date: 2/7/17

APPROVED BY:

print: _____

sign: _____

*actual dimensions may vary slightly

BARTOW PRECAST
770.382.4462
sales@bartowprecast.com
WWW.BARTOWPRECAST.COM