




11'x7'x6' (ID) Vault



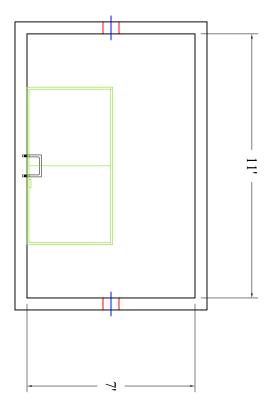

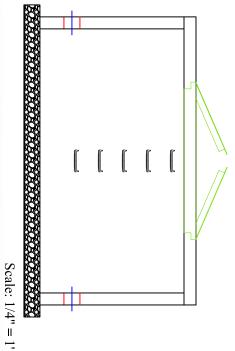



sales@bartowprecast.com 770.382.4462 NWW.BARTOWPRECAST.COM

SS120-61107 L1208-7236

Vault = 17,100 # Lid = 6,000 # 11'x7'x6' (ID) UTILITY VAULT PRODUCT INFORMATION

SPECIFICATIONS MEETS ASTM C858 & C857 *design may vary

RATING: NON-TRAFFIC

CONCRETE TO BE 4,000 PSI @ 28 DAYS

REINFORCING STEEL MEETS ASTM A 615

10" STEPS ON 12" CENTERS

BUTYL SEALANT MEETING ASTM C 990 TO BE USED ON JOINTS

ACCESS HATCH SHALL BE FABRICATED WITH 1/4"
ALUMINUM DIAMOND PLATE DESIGNED TO SUPPORT 300 psf 72"x36" FRAME OPENING EQUIPPED WITH: SLAM LOCK, FLUSH MOUNT LIFT HANDLE, HOLD-OPEN ARM, SS HARDWARE AND HINGES

PENETRATIONS SIZE AND LOCATION VARY PER JOB CALL FOR ADDITIONAL SPECS



DRAWING INFORMATION

Revision: Date: Drawn By: Checked By: 7/11/2025 ARL ARL

APPROVED BY:

ALINOA
LU

sign: actual dimensions may vary slightly