


3,000 Gallon Grease Interceptor **Dalton Utilities**





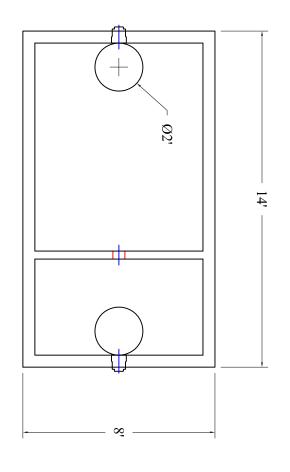

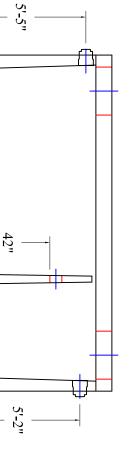





sales@bartowprecast.com WWW.BARTOWPRECAST.COM 770.382.4462

MODEL: 110-03032

3,000 GALLON GREASE INTERCEPTOR PRODUCT INFORMATION

TANK= 25,800 # LID= 10,700 # DESIGN MAY VARY

SPECIFICATIONS

MEETS ASTM C 1613

RATING: A-16 (H-20), ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN CONCRETE: 5,000 PSI @ 28 DAYS

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER

CROSSOVER TO BE 6" PVC



DRAWING INFORMATION

Drawn By: Checked By: Revision: Date: 12/18/18

APPROVED BY:

sign:	print:

*actual dimensions may vary slightly